Model 2702

Submersible Grinder Pump

50 Hz

Features:

- Hardened 440 stainless steel (56-60 Rockwell) shredding ring and cutter
- Cast iron ASTM A48 Class 30
- Semi-open impeller design prevent clogging
- Ductile iron impeller for superior quality and long life
- Double carbon / ceramic mechanical seal
- Thermal overload is mounted directly on the windings in the single phase models for maximum temperature sensing
- Oil-filled motor for better cooling and lubrication
- The cord seal is epoxy-potted for superior moisture resistance and anti-wicking
- 1-1/4" NPT discharge
- Standard 10 m (33') cord
- Horizontal discharge available



Applications:

- Low pressure sewer systems
- High head sewage systems
- Domestic, commercial, wastewater and sewage



Grinder Blade


100% factory tested

ZOELLER® PUMP COMPANY

Trusted. Tested. Tough.®


ZT0237_Eb
1024
Supersedes
1220


50 Hz

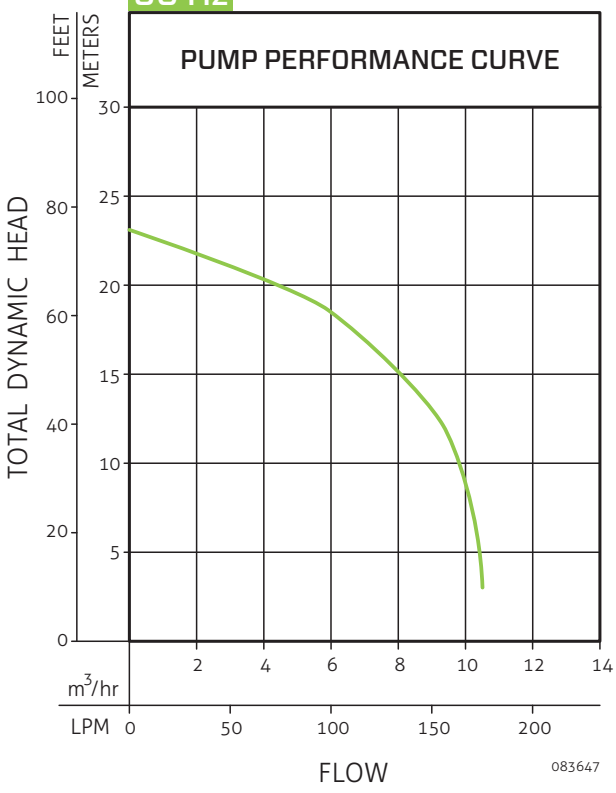

50 Hz

Model Double Seal	Mode	Volts (V)	Ph Ø	Amps (A)	Motor kW (p1)	Motor HP	Weight kg	Weight lbs
V2702	Non	220-240	1	10.0	2.2	1	33.5	74
WU2702	Auto-Tethered	220-240	1	10.0	2.2	1	34.0	75

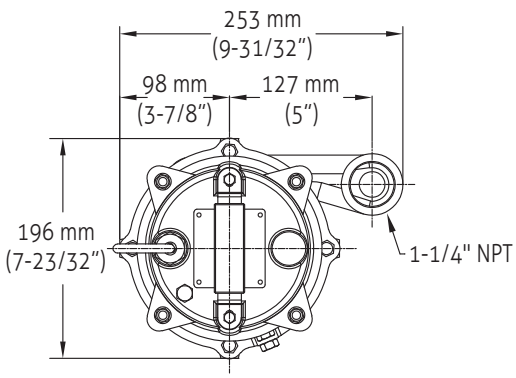

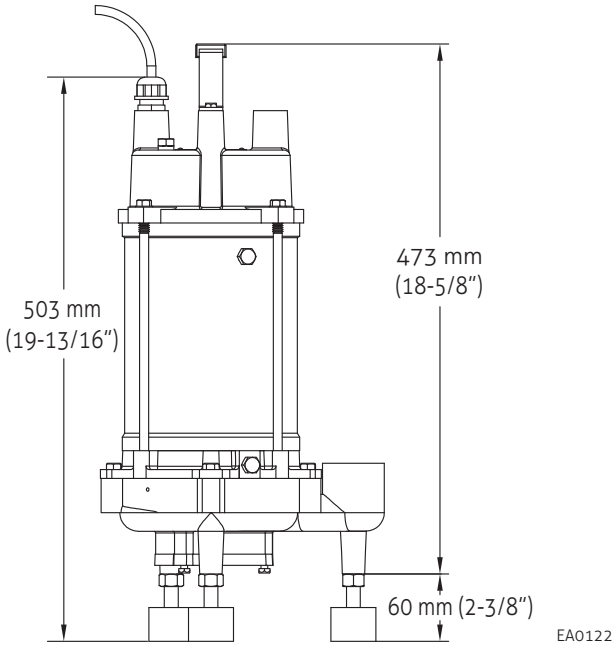

*Intended for indoor use only.

Product information presented here reflects conditions at time of publication.
Consult factory regarding discrepancies or inconsistencies.

© Copyright 2024 Zoeller ® Co. All rights reserved.

www.zoellerpumps.com