

Model 2722

50 Hz 60 Hz

Submersible Grinder Pump

Features:

- Hardened 440 stainless steel (56-60 Rockwell) shredding ring and grinding impeller
- Cast iron ASTM A48 Class 30
- Semi-open impeller prevents clogging
- Ductile iron impeller for superior quality and long life
- Single silicon carbide mechanical seal with secondary lip seal
- Thermal overload is mounted directly on the windings in the single phase models for maximum temperature sensing
- Oil-filled motor for better cooling and lubrication
- The cord seal is epoxy-potted for superior moisture resistance and anti-wicking
- 1-1/4" NPT discharge
- 10 m (33') cord (50 Hz) / 9 m (30') cord (60 Hz)

Applications:

- Low pressure sewer systems
- High head sewage systems
- Domestic, commercial, wastewater and sewage





Shredding Ring
and Cutter

100% factory tested




Trusted. Tested. Tough.®

ZT0292_Ec
11/20
Supersedes
0320

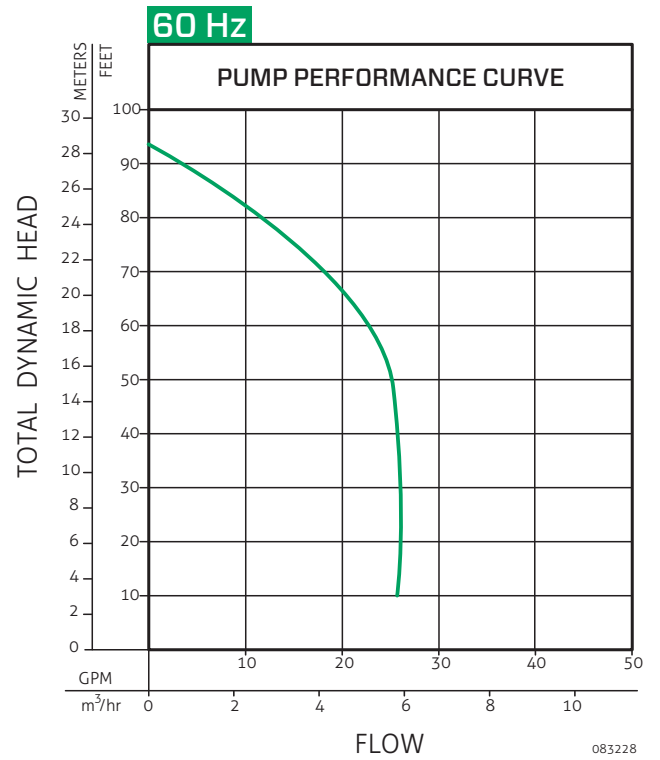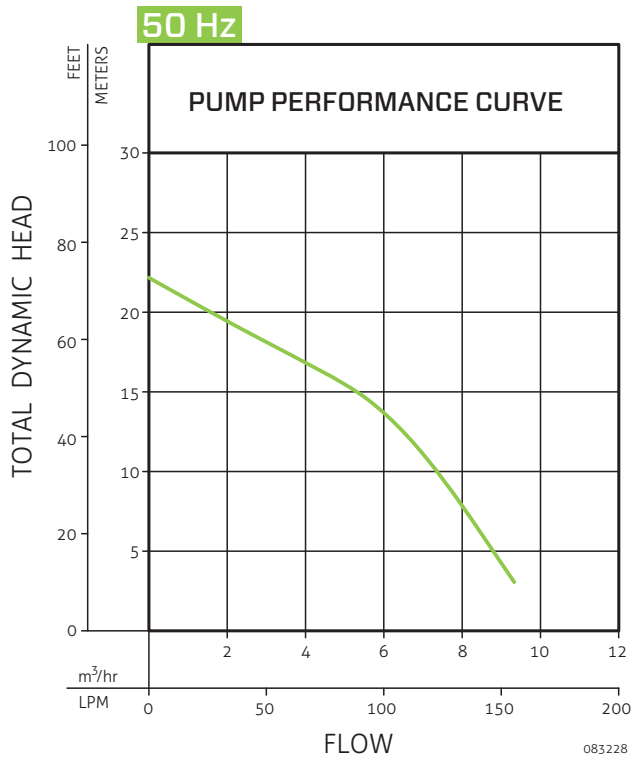


Model	Mode	Volts (V)	Ph Ø	Amps (A)	Motor		Weight	
					HP	kW (p1)	kg	lbs
V2722	Non-Auto	220	1	8.5	2	1.8	33	73
WU2722	Auto-Tethered	220	1	8.5	2	1.8	33.5	74

Model	Mode	Volts (V)	Ph Ø	Amps (A)	Motor		Weight	
					HP	kW (p1)	kg	lbs
BL2722	Non-Auto	220	1	10.0	2	2.1	33	73
WB2722	Auto-Tethered	220	1	10.0	2	2.1	33.5	74
E2722	Non-Auto	230	1	10.0	2	2.1	33	73

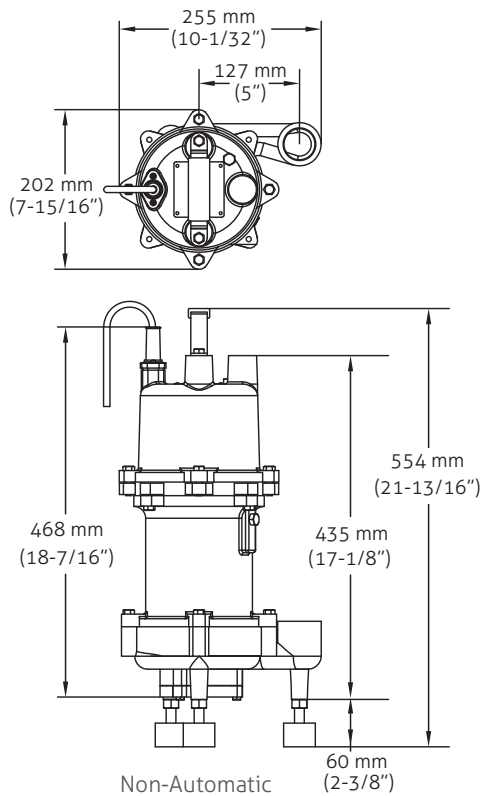

EA0124

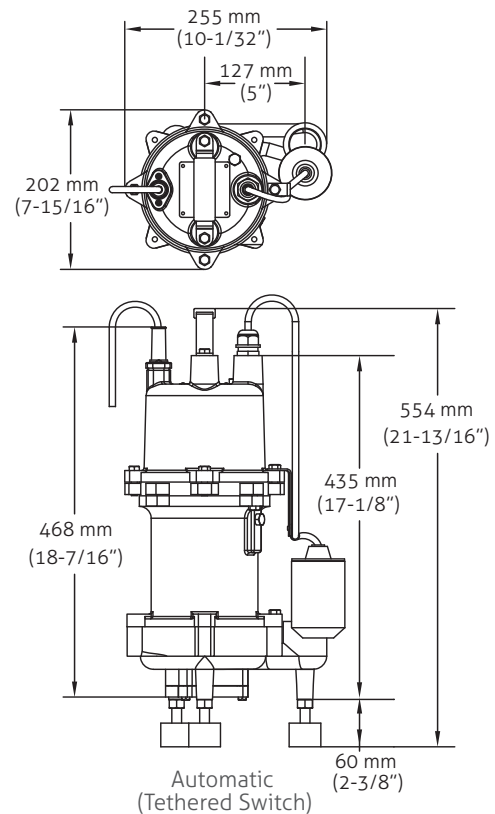

Product information presented here reflects conditions at time of publication.
Consult factory regarding discrepancies or inconsistencies.