



# Qwik Drain High Temperature / Commercial

**QUICK REFERENCE GUIDE.  
SEE INSTRUCTION MANUAL  
FOR COMPLETE DETAILS.**

<https://zh-tw.zoellerpumps.com/>  
<https://zoellerpumps.com/>




Accessories included are soft connectors, hose clamps, a vent valve, reducing hex nipple and 1.5" check valve.




**1** Drill the inlet with a 2" (50 - 51 mm) hole saw as needed.




**2** Connect the soft connector to the inlet and lock it with a hose clamp. The soft connector can be connected to 1-1/2" or 2" pipe. If the pipe is 2", it needs to be cut to the specified position with a box cutter.

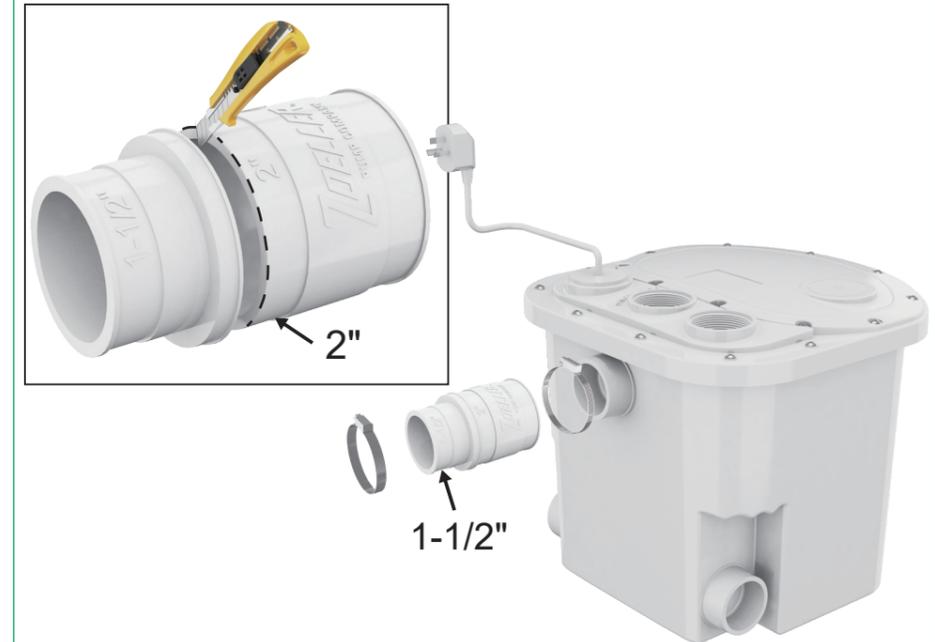


**3** Connect the 90° elbow to the back of the Qwik Drain and lock it with a hose clamp. Put the Qwik Drain into the installation area. The low side inlet should be at least 3.2" (8 cm) away from the wall, and the top inlet should be at least 8" (20 cm) away from the wall.

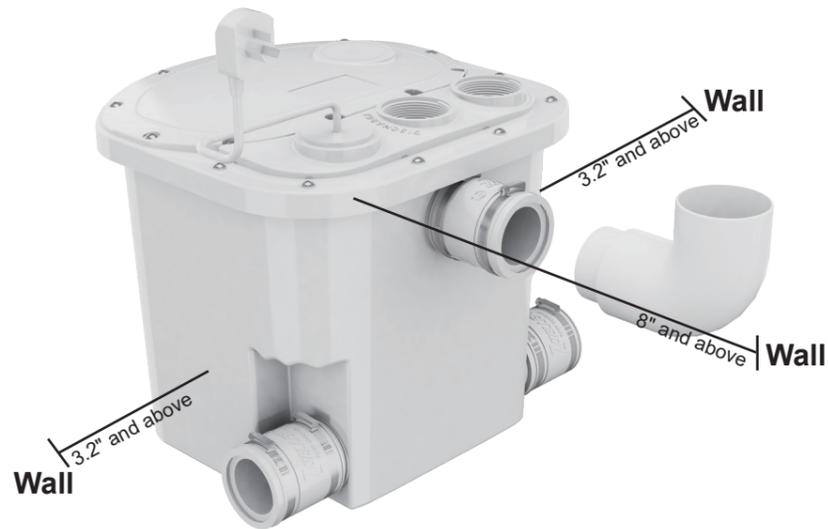

**4** Connect the pipes to both side inlets, if needed, and lock them with a hose clamp. Connect the top pipe to the 90° elbow.

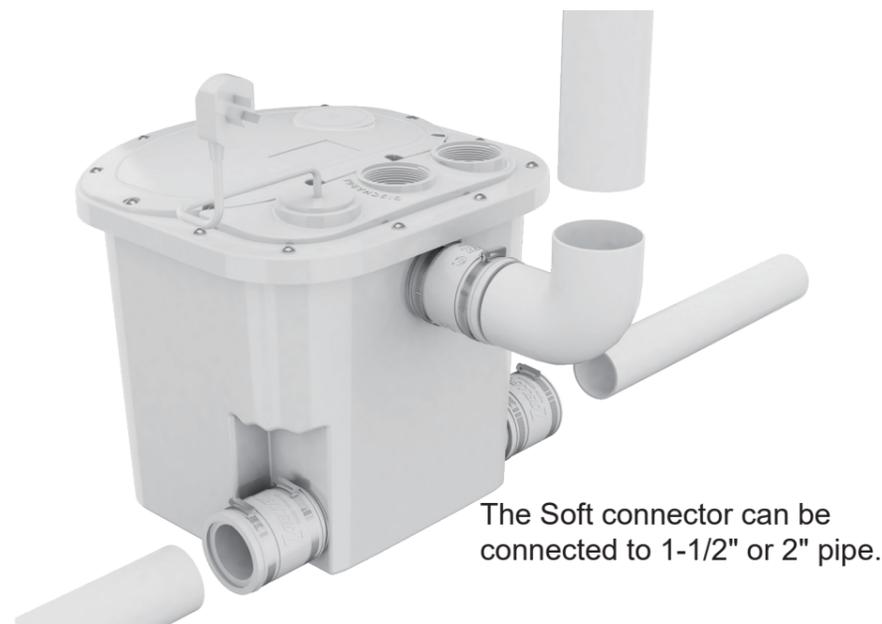

**5** Install the pipe fittings above the vents and discharge pipe. Once installed correctly, connect the Qwik Drain plug to an outlet. It is recommended to install an alarm; to do so, drill the hole before removing the cover.

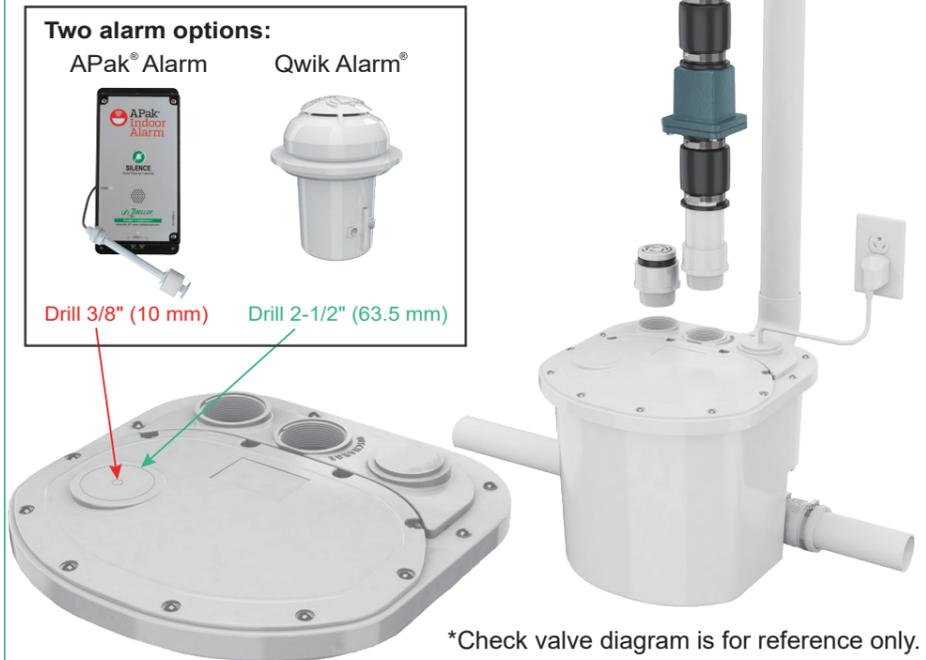

### FIRE/EXPLOSION HAZARD.

Do not pump flammable or explosive fluids such as gasoline, fuel oil, kerosene, etc. Do not use in a flammable and/or explosive atmosphere. Failure to follow these warnings could result in death or serious injury and/or property damage.



# Qwik Drain High Temperature / Commercial

## 快速安裝說明

如需要完整細節，請見安裝手冊

<https://zh-tw.zoellerpumps.com/>  
<https://zoellerpumps.com/>




配件包括軟管，白鐵管束，通氣閥，異徑立布和1.5"止回閥。




**1** 依使用需求將入水口用50 - 51 mm穴鑽鑽孔。



**2** 將軟管接上入水口並用鐵束環鎖緊。軟管可接1-1/2" 或2" 水管，如水管為2"，軟管需用美工刀裁切至指定位置。

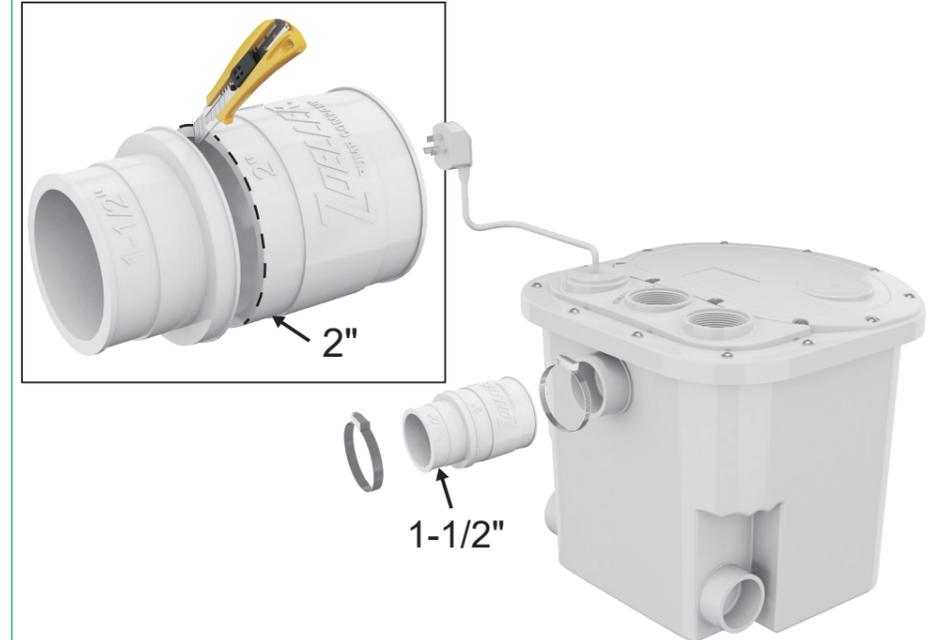

**3** 將90°彎管連接至桶身後側並用鐵束環鎖緊。並將高溫桶放入安裝區域。側入水口需離牆面距離8公分以上，後入水口需離牆面距離20公分以上。

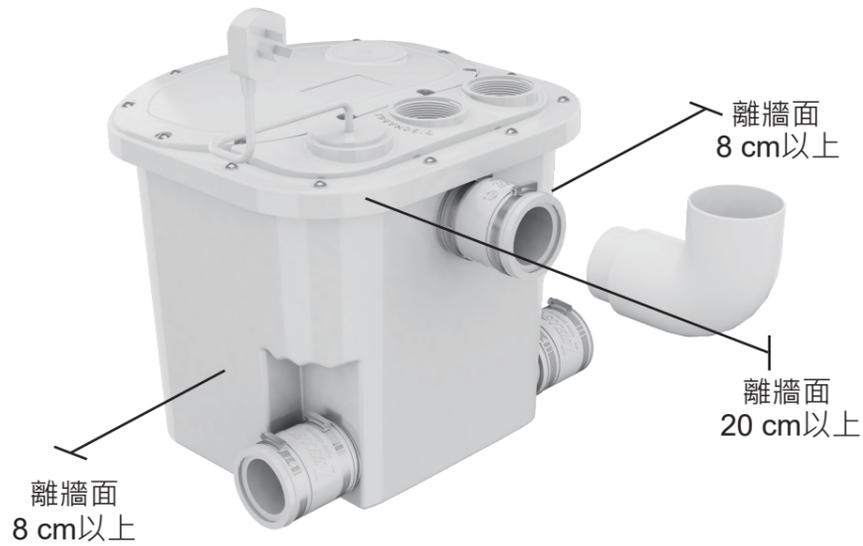

**4** 將入水管連接至兩側入水口並用鐵束環鎖緊。並且將上方入水管連接至90°彎管。



**5** 將管配件安裝至通氣孔和出水口上方。安裝無誤後將桶裝系統插頭連接至牆上電源插座。建議安裝警報器，先鑽孔再拆蓋。



### 火災/爆炸危險提醒

請勿泵送易燃或易爆液體，例如汽油，燃料油 及煤油等。  
請勿在易燃和/或易爆性的環境中使用。  
如不遵守這些警告可能會導致死亡或重傷和/或財產損失。