



## Qwik Drain Commercial

QUICK REFERENCE GUIDE.  
SEE INSTRUCTION MANUAL  
FOR COMPLETE DETAILS.

<https://www.zoellerpumps.com>




Accessories included are soft connector, hose clamps and check valve.




**1** Drill the inlet with a 50-51 mm (2") hole saw as needed.




**2** Connect the soft connector to the inlet and lock it with a hose clamp. The soft connector can be connected to DN50 or DN40 pipe. If the pipe is DN50, it needs to be cut to the specified position with a box cutter.

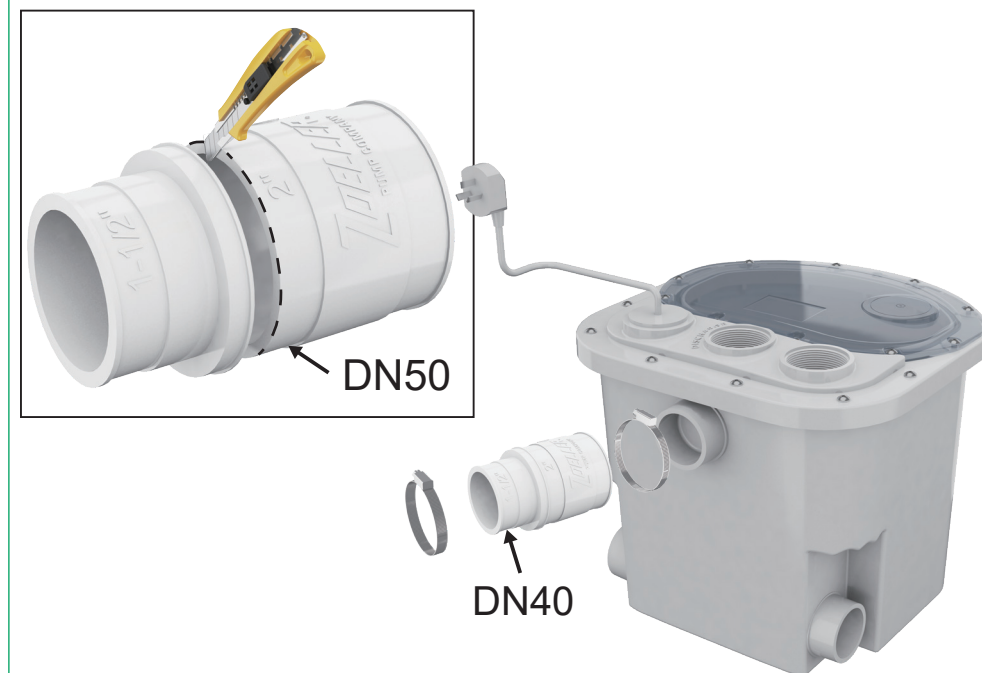

**3** Connect the 90° elbow to the back of the Qwik Drain and lock it with a hose clamp. Put the Qwik Drain into the installation area. The low side inlet should be at least 8 cm (3.2") away from the wall, and the top inlet should be at least 20 cm (8") away from the wall.

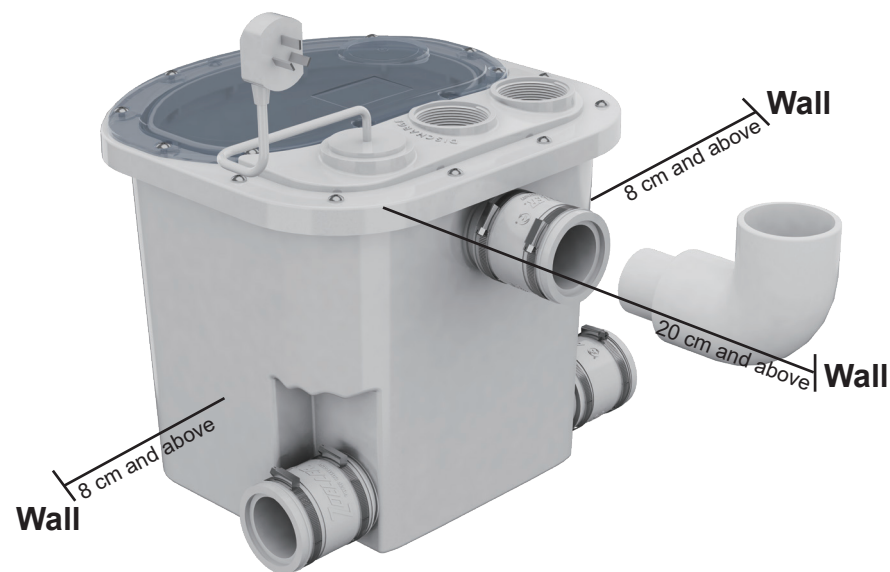

**4** Connect the pipes to both side inlets, if needed, and lock them with a hose clamp. Connect the top pipe to the 90° elbow.

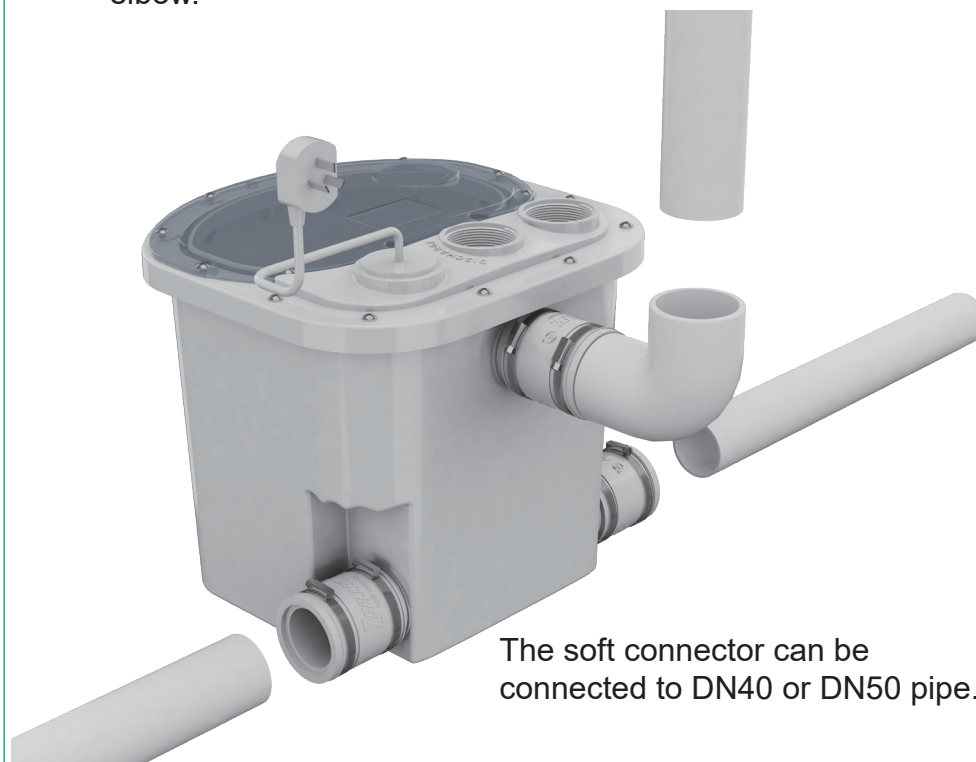

**5** Install the pipe fittings above the vents and discharge pipe. Once installed correctly, connect the Qwik Drain plug to an outlet. It is recommended to install an alarm; to do so, drill the hole before removing the cover.



### FIRE/EXPLOSION HAZARD.

Do not pump flammable or explosive fluids such as gasoline, fuel oil, kerosene, etc. Do not use in a flammable and/or explosive atmosphere. Failure to follow these warnings could result in death or serious injury and/or property damage.