

Model 88

Submersible Sump Pump

50 Hz

Features:

- Thermal overload protected motor and rugged cast iron motor housing for long life
- Highly efficient, oil filled motor for enhanced heat dissipation
- Stainless steel hardware provide improved corrosion resistance
- Vent hole prevents air lock
- Non clogging vortex impeller passes up to 9 mm (3/8") spherical solids
- Carrying handle for convenient pump placement
- Standard 4.5 m (14.7') cord. 10 m (33'), 6.1 m (20') cord available upon request
- Maximum operating water temperature 40 °C (104 °F)
- Switch on/off point: on: 178 mm (7"), off: 76 mm (3")

Applications:

- Wastewater drainage
- Water supply for agriculture irrigation and landscape
- Lake/River water transfer
- Construction site water removal
- Basement water removal

100% factory tested




Trusted. Tested. Tough.®




Multiple plug
options available.

ZT0051_Eb
1220
Supersedes
NEW

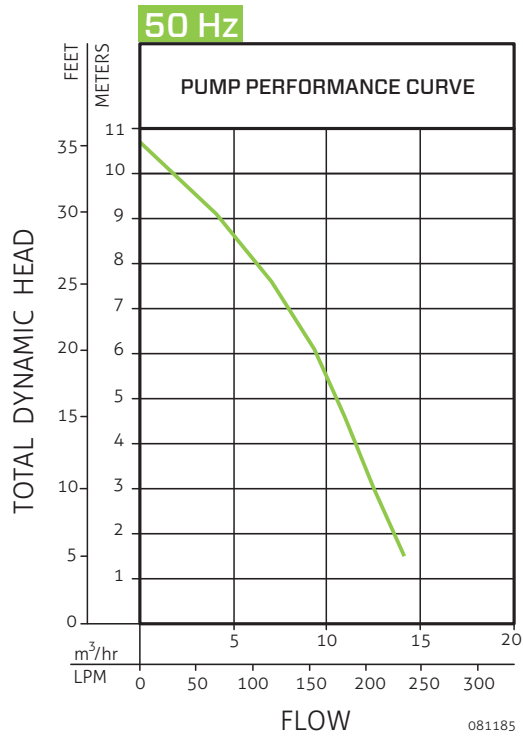

50 Hz

Model	Mode	Volt (V)	Ph Ø	Amps (A)	Motor		Weight	
					kW (p1)	HP	kg	lbs
U88	Auto-Vertical	220-240	1	3.8	0.76	3/4	11.7	25.8

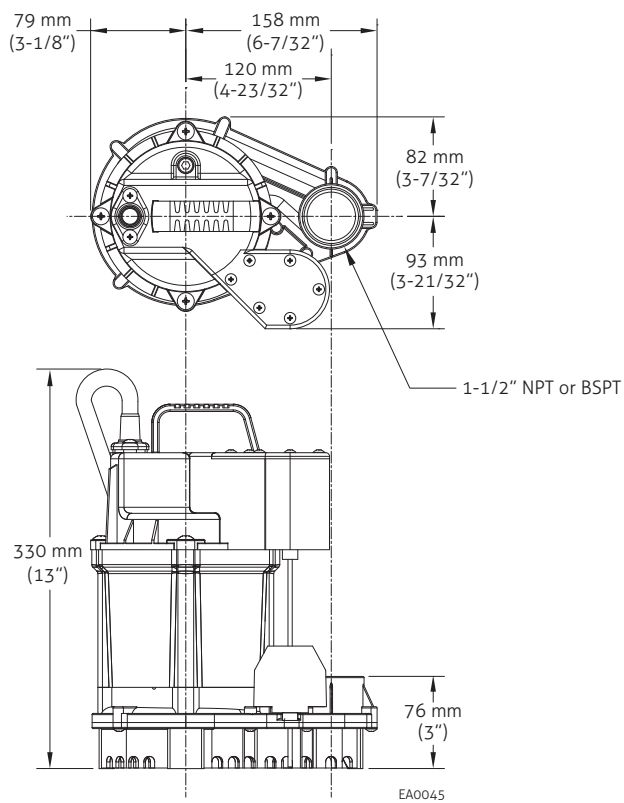

*Intended for indoor use only.

Product information presented here reflects conditions at time of publication.
Consult factory regarding discrepancies or inconsistencies.

© Copyright 2020 Zoeller® Co. All rights reserved.
www.zoellerpumps.com

