

Model 910

50 Hz

Simplex Sewage Package System

Simplex pump lifting system provides you with an integrated domestic sewage solution.

Suitable for a variety of applications including villas, shopping malls, supermarkets, transit stations, parking lots and other non-automatic sewage discharge places to municipal sewage pipe locations.

Features:

- The basin has multi-sided side plates, and the location of the water inlet can be selected according to the on-site pipeline configuration
- Can be installed in pitless or freestanding environments
- The minimum water inlet height is 180 mm
- Sealed top cover traps odors
- Plastic rib reinforced basin and cover makes it ideal for use in freestanding applications
- Easy to install in narrow spaces
- Anti-flotation basin body design
- Indentations on exterior sidewalls make it convenient to handle
- Clean concise appearance with 130 liter/34 gallon capacity makes it ideal for whole home applications




100% factory tested




Trusted. Tested. Tough.®

ZT0434_Eb
0924
Supersedes
NEW

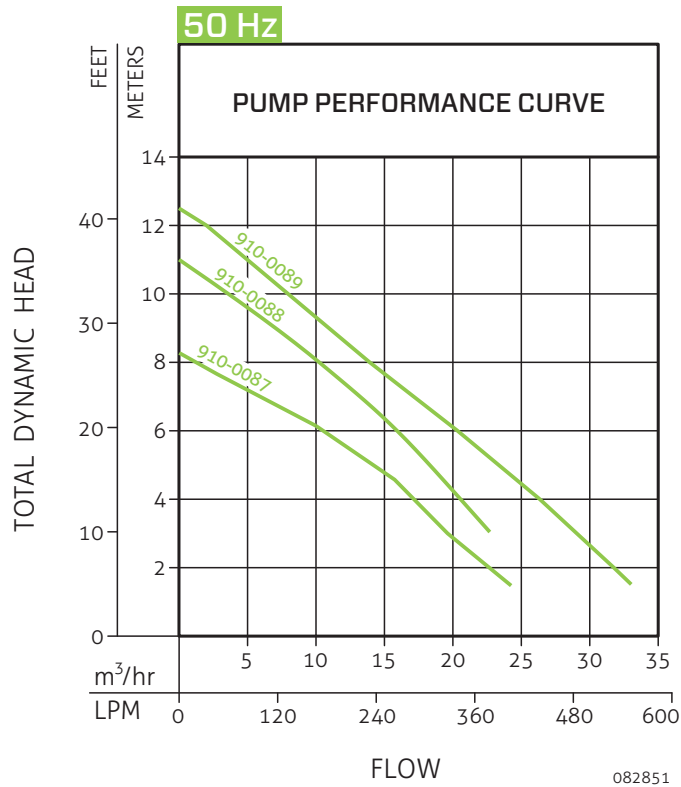

50 Hz

Model	Pump	Mode	Control Panel	Volt (V)	Ph Ø	Amps (A)	Motor		Spherical solids (mm)	Weight	
							kW (p1)	HP		kg	lbs
910-0087	V222	Non-Auto	10-3475	220	1	5.2	1.03	3/4	50	38	84
910-0088	V422	Non-Auto	10-3475	220	1	4.6	0.98	3/4	38	40	88
910-0089	V271	Non-Auto	10-3475	220	1	8.5	1.7	1	50	53	117

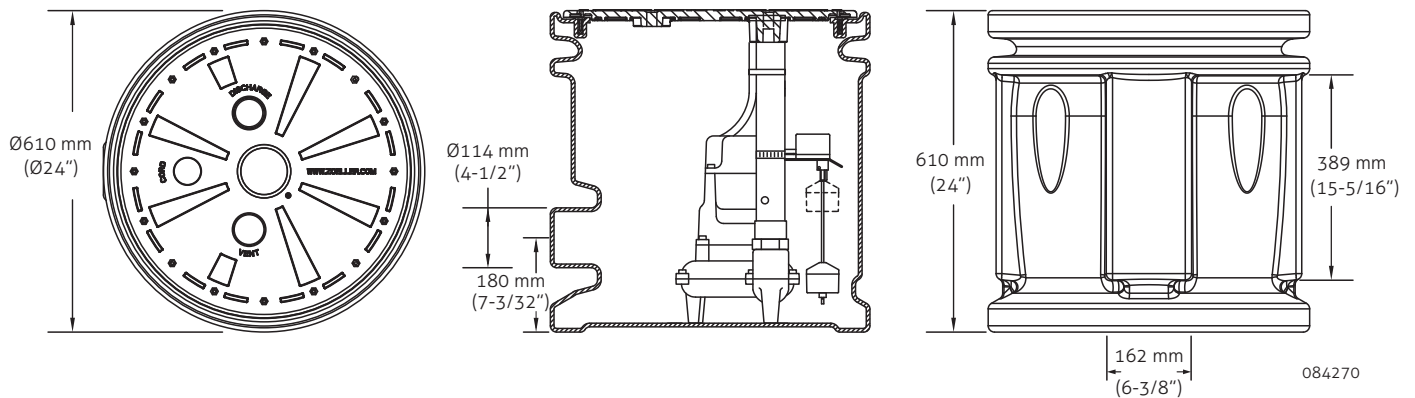

Product information presented here reflects conditions at time of publication.
Consult factory regarding discrepancies or inconsistencies.

© Copyright 2024 Zoeller® Co. All rights reserved.
www.zoellerpumps.com

ZOELLER 
PUMP COMPANY