Model 2242

Submersible Sewage Pump

50 Hz

Features:

- Cast iron ASTM A48 Class 30
- Ductile iron impeller for superior quality and long life
- Semi-open impeller design reduces bearing load, increases bearing life and prevents clogging
- Double carbon / ceramic mechanical seal
- Thermal overload is mounted directly on the windings in the single phase models for maximum temperature sensing
- Oil-filled motor for better cooling and lubrication
- The cord seal is epoxy-potted for superior moisture resistance and anti-wicking
- 2" NPT discharge
- Passes 50 mm (2") spherical solids
- Standard 10 m (33') cord



Applications:

- Wastewater / sewage handling
- Dewatering
- Water transfer


100% factory tested

ZOELLER® PUMP COMPANY

Trusted. Tested. Tough.®


ZT0260_Eb
1024
Supersedes
0721


50 Hz

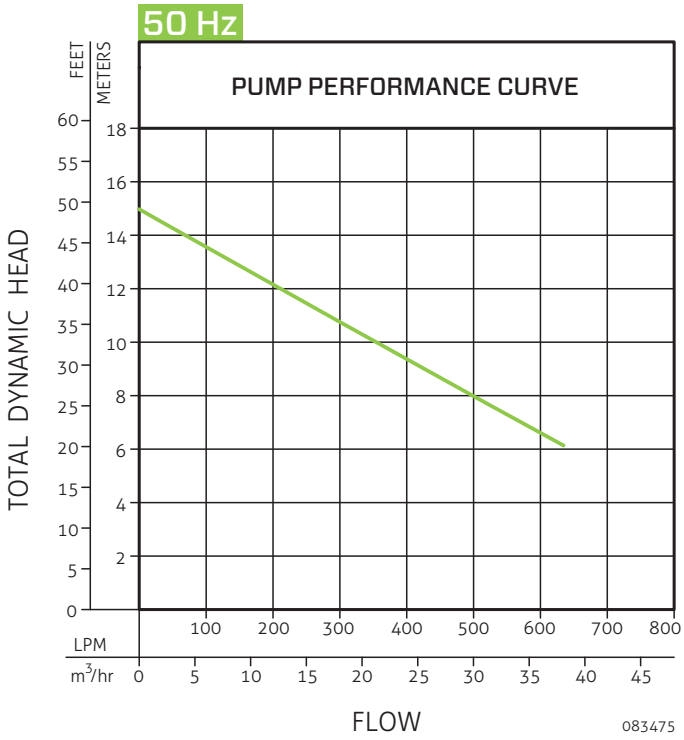

50 Hz

Model Double Seal	Mode	Volts (V)	Ph Ø	Amps (A)	Motor		Weight	
					HP	kW (p1)	kg	lbs
2242	Non-Auto	220	1	15	2	3.3	34.3	76

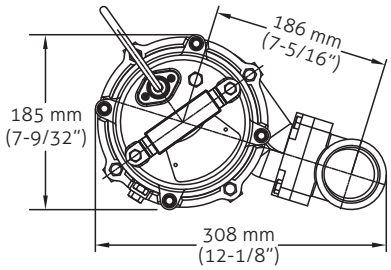

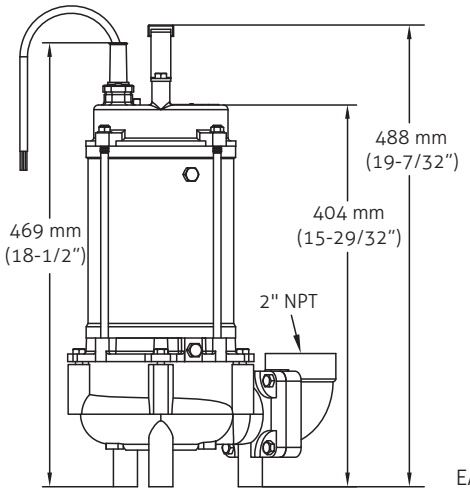

Product information presented here reflects conditions at time of publication.
Consult factory regarding discrepancies or inconsistencies.

© Copyright 2024 Zoeller ® Co. All rights reserved.

www.zoellerpumps.com

ZOELLER® PUMP COMPANY